

American Aires Inc.
Research and Development department

REPORT

**R&D: Evaluation of the effectiveness of the Aires Defender Pro
(2018 model)**

Project manager:

I. Serov

Responsible researcher:

K. Korshunov

Researchers:

I. Soltovskaya

T. Shamko

Consultants:

Doctor of Technical Sciences, Professor A.V. Kopyltsov of Saint Petersburg
Electrotechnical University LETI

Professor of Vilnius Gediminas Technical University, A. Jukna.

The protective properties of the Aires Defender Pro are due to its ability to coherently convert the technogenic electromagnetic radiation, including mobile communications, without weakening the original signal [1], [2].

An electromagnetic field converted using the Aires Defender Pro is a stationary coherent wave superposition with a corresponding energy density characterized by intensity I (see table). Calculations were made for the frequency 2.4 GHz, which is standard for Wi-Fi radiation and 4G mobile communications. The effectiveness of the Aires Defender Pro was estimated based on the intensity of the field transformed into a coherent form, determining the zone of maximum action.

The stable electromagnetic field generated by the Aires Defender Pro has several fractal levels due to the number of ring elements in the topological circuit of its microprocessor and the size of the circuit itself [3]. Outside the zone of maximum action, the density of the highly coherent field begins to decrease and, accordingly, the effectiveness of the device decreases.

Table of the basic parameters of the Aires Defender Pro

Diameter of the C28S microprocessor circuit	0.018 m
Number of elements in the topological circuit of the microprocessor	707281
Device size	0.054 x 0.085 m
Radius of the maximum effective zone of influence	0.324 m
Intensity I of the EM field in the maximum effective zone	356 W/m ²

Fig. 1 shows the scale of the drop in the Aires Defender Pro's effectiveness using the example of its interaction with Wi-Fi radiation at a frequency of 2.4 GHz ($I \sim 0.33 \text{ W/m}^2$).

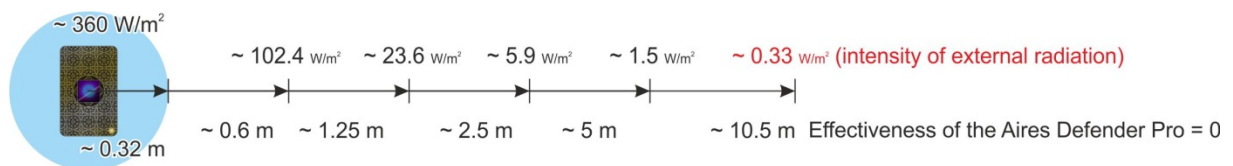


Fig. 1. Scale of the drop in the effectiveness of protection from the Aires Defender Pro.

When the protective electromagnetic field's intensity decreases to the parameters of the intensity of external radiation, the Aires Defender Pro's effectiveness drops to zero.

If there are several external sources of radiation, it is necessary to use several Aires Defender Pro devices in conjunction with the Aires Guardian, since the external radiation's total intensity dramatically reduces the Aires Defender Pro's zone of effective influence.

The decrease in effectiveness is determined by the decrease in the intensity of the protective EM field, which is inversely proportional to the square of the distance from the device (Aires Defender Pro) and is estimated using the following formula:

$$I \sim \frac{1}{R^2} .$$

At a distance of 2.5 m from the center of the Aires Defender Pro, the intensity of the protective field reaches a value at which the effectiveness drops to a critical level (see Figure 2), determining the boundary of a highly coherent spherical field with a diameter of 5 m.

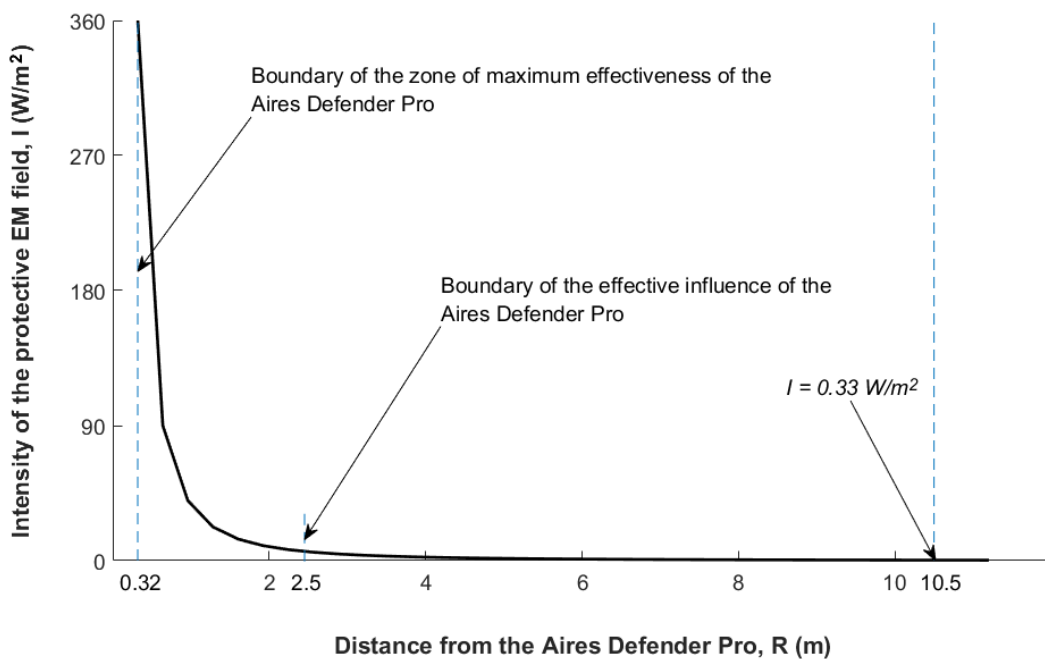


Fig. 2. Graph of the effectiveness of the Aires Defender Pro as a function of distance.

Thus, the recommended coverage diameter of the effective influence of the Aires Defender Pro is ~ 5 m.

BIBLIOGRAPHY

1. Dainius Jasaitis, Vaida Vasiliauskiene, Paulius Miskinis, Jovita Damauskaite, Arturas Jukna, Aleksandr Kopyltsov, Genady Lukyanov, Konstantin Korshunov, Igor Serov Investigation Of The Circle Fractal Structure Interaction with Gigahertz Frequency Electromagnetic Waves, ITMS 2018.
2. Kopyltsov A.V., Korshunov K.A., Lukyanov G.N., Serov I.S. Distributed computing of interaction of electromagnetic radiation with a structured surface, Regional Informatics and Information Security., 2016.
3. Serov I.S., Korshunov K.A., Soltovskaya I.A., Shamko T.V., Kopyltsov A.V., A. Yukna R&D: Calculation of the strength and intensity of the electromagnetic field during the interaction of electromagnetic radiation at a frequency of 2.4 GHz (Wi-Fi) with an Aires C28S resonator (microprocessor), which is used in the Aires Defender Pro 2018 (2018 model).